

GT4907/4907C



Description

16 Megapixel CCD camera for extreme environments - GigE Vision®



The Prosilica GT4907 is a 16 Megapixel camera with a Gigabit Ethernet interface (GigE Vision®). The GT4907 is a rugged camera designed to operate in extreme environments.

- Truesense KAI-16070 sensor
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma, multiple LUT, color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Wide operating temperature range
- Global shutter (digital shutter)
- Camera temperature monitoring
- **Models:**
 - GT4907, 4864 x 3232, 7.6 fps, CCD mono
 - GT4907C, 4864 x 3232, 7.6 fps, CCD color

Specifications

Prosilica GT		4907	
Interface	IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE)		
Resolution	4864 x 3232		
Sensor	Truesense KAI-16070		
Sensor type	CCD Progressive		
Sensor size	Type 35 mm		
Cell size	7.4 μ m		
Lens mount	F-Mount (M58 optional)		
Max frame rate at full resolution	7.6 fps		
A/D	14 bit		
On-board FIFO	128 MB		
Output			
Bit depth	14 (mono) - 12 (color) bit		
Mono modes	Mono8, Mono12, Mono12Packed, Mono14		
Color modes YUV	YUV411Packed, YUV422Packed		
Color modes RGB	RGB8Packed, BGR8Packed, RGBA8Packed, BGRA8Packed		
Raw modes	BayerGR8, BayerGR12, BayerGR12Packed		
General purpose inputs/outputs (GPIOs)			
TTL I/Os	1 input, 2 outputs		
Opto-coupled I/Os	1 input, 2 outputs		
RS-232	1		
Operating conditions/Dimensions			
Operating temperature	-20°C ... +50°C		
Power requirements (DC)	PoE, or 7-25 VDC		
Power consumption (12 V)	7.7 W @ 12 VDC		
Mass	372 g		
Body Dimensions (L x W x H in mm)	96 x 66 x 53.3 mm including connectors, w/o tripod and lens		
Regulations	CE, FCC Class A, RoHS (2011/65/EU)		

[Download the Prosilica GT4907 technical drawing](#)

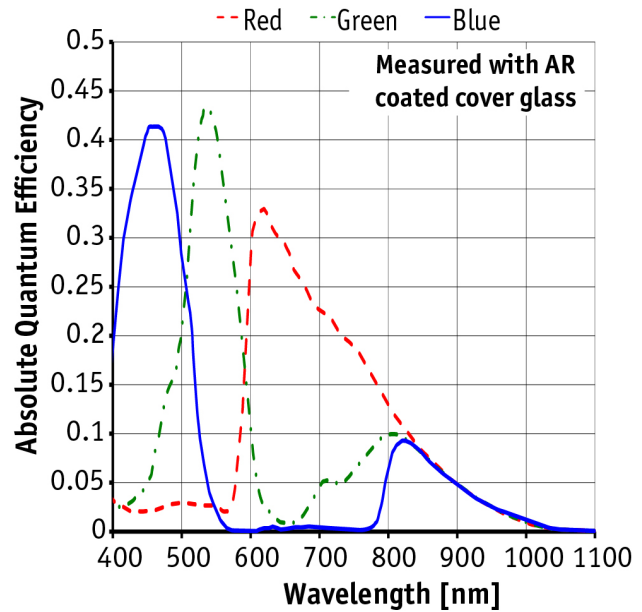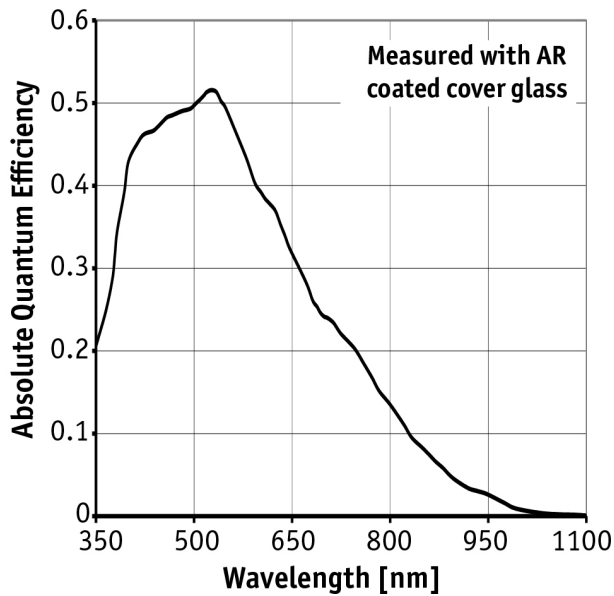

Smart features

The Prosilica GT4907 features include:

- Auto exposure
- Auto gain
- Auto white balance
- Flexible binning
- Region of Interest (ROI) readout
- DSP subregion (selectable ROI for auto features)
- StreamBytesPerSecond (easy bandwidth control)
- Stream hold
- Asynchronous external trigger and sync I/O
- Power over Ethernet (PoE)
- Ethernet surge suppression
- Gamma
- Multiple LUT
- Color correction
- Metadata (Chunk data)
- Clock synchronization (IEEE1588)
- Recorder and multiframe acquisition modes
- Camera temperature monitoring

Applications

The Prosilica GT4907 is ideal for a wide range of applications including:

- Outdoor imaging
- Traffic imaging / ITS
- Public security and surveillance
- Industrial inspection
- Machine vision
- Military and space applications